



**nightsun**® 夜太阳

NIGHTSUN PRO LIGHTING EQUIPMENT CO.,LTD.  
广州市夜太阳舞台灯光设备有限公司

地址：广州市白云区钟落潭镇广龙路夜太阳工业园  
电话：020-66847000 66847003 (总机10线)  
传真：020-66847009  
网址：[www.nightsun.com.cn](http://www.nightsun.com.cn)  
邮箱：[china@nightsun.com.cn](mailto:china@nightsun.com.cn)

Add:Nightsun Industrial park,Guanglong Rd.,  
Zhongluotan Town,Baiyun Area,Guangzhou,China  
Tel:86+20+66847000 66847002 Fax: 66847009  
Website:[www.nightsun.net](http://www.nightsun.net)  
Email:sales@nightsun.com.cn

Any change on the catalogue, please consult the practicality on ordering



Unique Innovation in the World, 23 Patent Rights in China



MiniStage  
微舞台

**MINISTAGE**  
Lighting



2

2016



广州市夜太阳舞台灯光设备有限公司  
NIGHTSUN PRO LIGHTING EQUIPMENT CO.,LTD.



私藏在心中的浪漫舞台 |  
Private-own Romantic Stage in the mind |




微舞台S灯

## 全球首创

【国家专利·政府奖励】

miniSTAGE Lighting  
Unique Innovation in the World  
23 Patent Rights in China

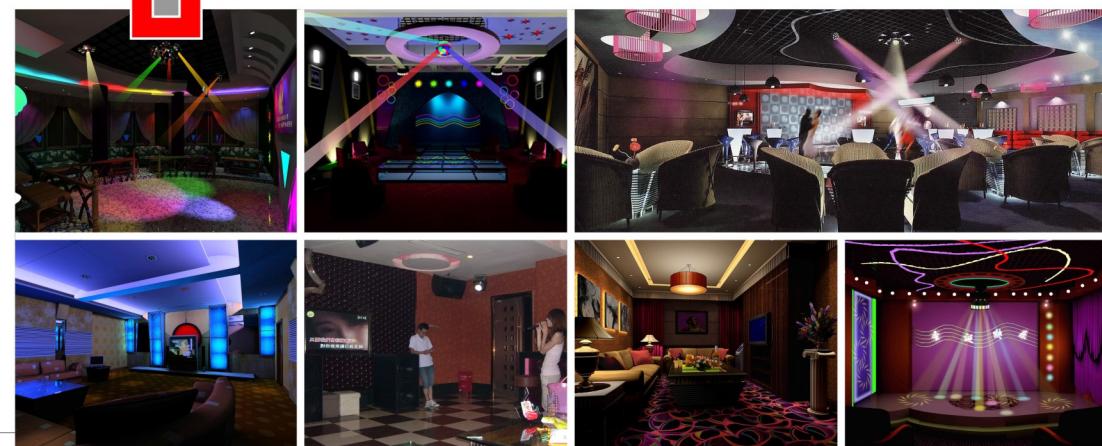

### 应用于KTV包房

天花板黑乎乎，舞台灯光不美观，操作太麻烦、安装太复杂，费用大，不经济。

### Applied in KTV ROOM

Installing in home the traditional stage lighting is complex and costly.



KTV包房，俱乐部，酒吧，商场，从此  
更酷，更美观，更有气氛，更便捷操作……

KTV's, clubs, bars, and shopping malls will forever be  
Cool, beautiful, romantic and easy to operate.



多灯组合媲美舞台  
Multiple combination to  
Compare the traditional stage



经专业调查公司调查，90%业主愿意从此改变……

过去  
BEFORE



A professional study shows that 90% proprietors are willing to make a change for their lightings.



应用于**多功能厅**  
Applied in **MULTI-FUNCTION HALL**

高楼大厦会议室，受层高的限制，受装修的限制，舞台灯光只能是牵就的选择，大体积黑外壳，加上黑乎乎的葡萄架，严重影响美观。

Limited by the physical conditions of the building, e.g. Height, decoration regulation, etc. the presentation of the lightings is affected by the black trussings, lighting chasis.



Lighting in skyscrapers or luxurious conference rooms Will not be complex, heavy, ugly and costly to operate.

高楼大厦/豪华多功能厅，从此  
不要繁琐、笨重、丑陋、昂贵……



科学搭配出奇效  
Magnificent effect by the scientific combinations



**LED摇头方束**  
**LED MOVING HEAD SQUARE BEAM**  
Model: **HSA001R/G/B/W**

HSA001 是一款光源为2W的LED摇头光束灯，  
分别为R、G、B、W四种颜色，  
X轴360度旋转，Y轴50度旋转。

光源：2W一体式光学 灯具分别为R、G、B、W四种颜色  
控制通道：5个DMX通道  
频闪：高速的电子调节频闪，频率可达1~20次/秒  
控制模式：DMX控制模式、声控模式、主从模式、程序自走模式  
光学效果：频闪、光束  
输入电压：适配器AC100-240V 灯体DC12V  
DMX插座：RJ45网线座子一进一出  
额定功率：13W  
最高使用环境温度：40°C

**HSA001 is a kind of 2W LED Moving Head Beam Light,**  
which with R, G, B, W four colors respectively.  
**360° X-axis rotation and 50° Y-axis rotation.**

Light Source: 2W integrated optical,  
with R, G, B, W four colors respectively.  
Control Channel : 5 DMX Channels  
Control Protocol: International standard DMX512 control protocol  
Strobe: High- speed electronic adjustment strobe,  
frequency up to 1 to 20 times / sec  
Control Mode: DMX Control Mode, Sound Activated, AUTO, Master Slave  
Optical effects: Strobe  
Input Power: Adapter AC100-240V Light DC12V  
DMX Socket: RJ45 network socket with one input and one output.  
Power consumption: 13W  
Working Environment: up to 40°C

产品尺寸 Dimension: 141×φ102mm  
彩盒尺寸 Gift box Package: 250×150×115mm  
净重N.W.: 0.71Kg  
毛重G.W.: 1.05 kg





## LED水晶魔球 LED CRYSTAL BALL

Model: HSA020

HSA020是一款LED水晶魔球，红绿蓝LED经过水晶透镜，再由步进电机带动水晶透镜无极转动，并配合LED红绿蓝变幻形成丰富的娱乐效果。

光源：红绿蓝3x3W 透镜：水晶透镜

控制通道：5个DMX通道

频闪：高速的电子调节频闪，频率可达1~20次/秒

控制模式：DMX控制模式、声控模式、主从模式、程序自走模式

光学效果：频闪，红绿蓝LED经过水晶透镜，

再由步进电机带动水晶透镜无极转动，形成旋转变幻的红绿蓝光束。

输入电压：适配器AC100-240V 灯体DC12V

额定功率：13W

最高使用环境温度：40°C

**HSA020 is a LED Crystal Ball. It can generates rich entertaining effect by red, green and blue lights getting through the crystal lens, then stepping motor driving the crystal lens to make unlimited rotation with red, green and blue LED continually rotating and changing.**

Light Source: R,G,B 3X3W Lens: crystal lens

Control Channel : 5 DMX Channels

Control Protocol: International standard DMX512 control protocol

Strobe: High-speed electronic adjustment strobe, 1-20 flashes / sec

Control Mode: DMX, Sound Activate, AUTO,Master Slave

Optical effects: Strobe, red, green and blue LED lights get through crystal lens, by stepping motor driving crystal lens to make unlimited rotation,

generating rich rotating the changing light with RGB.

Input Power: Adapter AC100-240V Light DC12V

Power consumption: 13W

Working Environment: up to 40°C



产品尺寸Dimension: 141×φ102mm

彩盒尺寸Gift box Package: 250×150×115mm

净重N.W: 0.6Kg

毛重G.W: 0.94 kg



## LED钻石魔球 LED DIAMOND BALL

Model: HSA021

HSA021是一款LED钻石魔球，红绿蓝LED经过钻石透镜，再由步进电机带动钻石透镜无极转动，并配合LED红绿蓝变幻形成丰富的娱乐效果。

光源：红绿蓝3x3W 透镜：水晶透镜

控制通道：5个DMX通道

频闪：高速的电子调节频闪，频率可达1~20次/秒

控制模式：DMX控制模式、声控模式、主从模式、程序自走模式

光学效果：频闪，红绿蓝LED经过钻石透镜，

再由步进电机带动钻石透镜无极转动，形成旋转变幻的红绿蓝光束。

输入电压：适配器AC100-240V 灯体：DC12V

额定功率：13W

最高使用环境温度：40°C

**HSA021 is a LED DIAMOND BALL. The RGB LEDs form rich entertainment effect through the rotating diamond Lens which is driven by stepper motor.**

Light Source: R,G,B 3X3W LENS: Crystal Lens

Control Channel : 5 DMX Channels

Control Protocol: International standard DMX512 control protocol

Strobe: High-speed electronic adjustment strobe, 1-20 flashes / sec

Control Mode: DMX, Sound Activate, AUTO,Master Slave

Optical effects: Strobe, red, green and blue LED through diamond lens, again stepping motor to drive moving by the diamond lens to form changeable rotation of RGB lights.

Input Power: Adapter AC100-240V Light DC12V

Power consumption: 13W

Working Environment: up to 40°C

产品尺寸Dimension: 141×φ102mm

彩盒尺寸Gift box Package: 250×150×115mm

净重N.W: 0.6Kg

毛重G.W: 0.94 kg





## LED花开花合 LED COLORFUL MIMOSA

**Model HSA030**

HSA030是一款红绿蓝白LED经过菲涅尔透镜，再由步进电机带动菲涅尔透镜无极转动，形成旋转分合光束效果的灯具。

光源：Φ5红绿蓝白各两粒 菲涅尔透镜

控制通道：4个DMX通道

频闪：高速的电子调节频闪，频率可达1~20次/秒

控制模式：DMX控制模式、声控模式、主从模式、程序自走模式

光学效果：频闪 最高使用环境温度：40°C

输入电压：适配器AC100-240V 灯体DC12V 额定功率：6W

**HSA030 is a effect light with RGBW LEDs, forming Rotation beam effect first via the rotating Fresnel lens which driven by the stepper motor.**

Light Source: Φ5(R,G,B,W) Lens: Fresnel lens

Control Channel: 4 DMX Channels

Control Protocol: International standard DMX 512 control protocol

Strobe: High-speed electronic adjustment strobe, 1-20 flashed/sec

Control Mode: DMX, Sound Activate, AUTO, Master Slave

Optical effects: Strobe, Working Environment: up to 40°C


Input Power: Adapter AC100-240V Light DC12V Power Consumption : 6W

产品尺寸Dimension: 141×φ102mm

彩盒尺寸Gift box Package: 250×150×115mm

净重N.W: 0.48Kg

毛重G.W: 0.82 kg

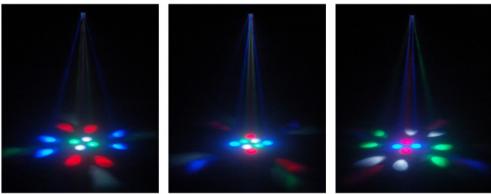

## LED迷官方阵 LED RGB MOSAIC ARRAY

**Model HSA031**

HSA031是一款32颗红绿蓝LED经过菲涅尔透镜聚焦成像，形成众多彩色光束效果的灯具。

光源：Φ5红12绿10蓝10 透镜：菲涅尔透镜

控制通道：4个DMX通道

频闪：高速的电子调节频闪，频率可达1~20次/秒

控制模式：DMX控制模式、声控模式、主从模式、程序自走模式

光学效果：频闪 32颗红绿蓝LED经过菲涅尔透镜聚焦成像，形成众多彩点效果

输入电压：适配器AC100-240V 灯体DC12V 额定功率：6W

最高使用环境温度：40°C

**HSA031 is a 32 LED Light with R/G/B colors, which focus image by Fresnel lens, produces various color beam effect.**

Light Source: Φ5 B12, G10, B10 . Lens: Fresnel lens

Control channel : 4 DMX Control Protocol:DMX512

Control Mode: DMX, Sound Activate, AUTO, Master Slave

Strobe: High- speed electronic adjustment strobe, 1- 20 flashes / sec

Optical Effect: 32 LEDs Focus Image by Fresnel lens, and produce various color effect.

Input Power: Adapter AC100-240V Light DC12V

Power consumption: 6 W



Working Environment: up to 40°C

产品尺寸Dimension: 141×φ102mm

彩盒尺寸Gift box Package: 250×150×115mm

净重N.W: 0.41Kg

毛重G.W: 0.75kg

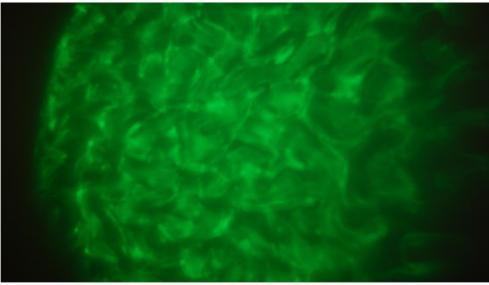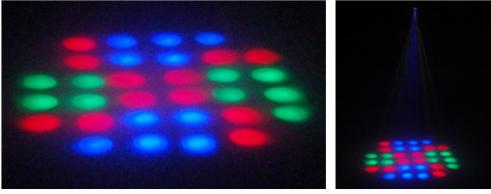

## LED水纹微波 LED WATER RIPPLE

**Model HSA040**

HSA040是一款LED水纹微波，红绿蓝LED经过透镜聚焦后，再通过由步进电机带动的水纹镜，形成水纹微波荡漾的效果。

光源：红绿蓝3W三合一 透镜：水纹镜、凸透镜

控制通道：4个DMX通道

频闪：高速的电子调节频闪，频率可达1~20次/秒

控制模式：DMX控制模式、声控模式、主从模式、程序自走模式

光学效果：频闪 红绿蓝LED经过透镜聚焦后，

再通过由步进电机带动的水纹镜，形成水纹微波荡漾的效果。

输入电压：适配器AC100-240V 灯体DC12V

额定功率：13W 最高使用环境温度：40°C

**HSA040 is LED Water Ripple Light. The RGB LEDs focus by lens first, then through waterlines lens which is driven by a stepper motor and finally form waterlines rippling effect.**

Light Source:3W RGB 3 in 1 Lens: waterlines lens, convex lens

Control Channel: 4 DMX Channels

Control Mode: DMX, Sound Activate , AUTO, Master Slave

Control Protocol: International standard DMX512 control protocol

Strobe: High- speed electronic adjustment strobe, 1-20 flashes/sec

Optical effects: Strobe, the RGB LEDs focus by lens first, then through waterlines lens which is driven by a stepper motor and finally form waterlines rippling effect.


Input Power: Adapter AC100-240V Light DC12V

Power consumption: 13W Working Environment: up to 40°C

产品尺寸Dimension: 141×φ102mm

彩盒尺寸Gift box Package: 250×150×115mm

净重N.W: 0.57Kg 毛重G.W: 0.91 kg

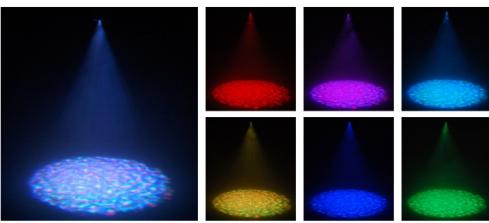

## LED大号图案 LED FLOWER PATTERN

**Model HSA052**

HSA052是一款LED大号图案灯，白光LED经过凸透镜聚焦，再通过由不经电机带动的图案盒和色片盒后，最后通过凸透镜聚焦成像形成多种颜色图案效果。

光源：8W LumiEngin-SC3 透镜：凸透镜

控制通道：4个DMX通道

频闪：高速的电子调节频闪，频率可达1~20次/秒

控制模式：DMX控制模式、声控模式、主从模式、程序自走模式

光学效果：白光LED经过凸透镜聚焦，再通过由不经电机带动的图案盒

和色片盒后，最后通过凸透镜聚焦成像形成多种颜色图案效果。

输入电压：适配器AC100-240V 灯体DC12V

额定功率：13.5W 最高使用环境温度：40°C

**HSA052 is large LED gobo Light. The white light focus by convex lens first, and through the gobo wheel and color wheel which are not controlled by motor, finally form many kinds of colorful gobo effects via convex lens' focusing.**

Light Source: 8W LumiEngin-SC3 Control Channel : 4 DMX Channels

Control Protocol: International standard DMX512 control protocol

Strobe: High- speed electronic adjustment strobe, 1- 20 flashes / sec

Control Mode: DMX , Sound Activate , AUTO, Master Slave

Optical effects: The white light focus by convex lens first, and through the gobo wheel and color wheel which are not controlled by motor, finally form many kinds of colorful gobo effects via convex lens' focusing.

Input Power: Adapter AC100-240V Light DC12V

DMX Socket: RJ45 network socket with one input and one output.

Power consumption: 13.5W Working Environment: up to 40°C





### LED变焦光束 LED ANGLE RANGE BEAM

Model: HSA080

HSA080是一款LED调焦光束灯，白光LED经过由步进电机驱动上下移动的菲涅尔透镜，聚焦成像后形成大小变换的光束效果。

光源: 8W LumiEngin-SC3 透镜: 菲涅尔透镜

控制通道: 4个DMX通道 变焦范围: 4° - 47°

频闪: 高速的电子调节频闪, 频率可达1~20次/秒

控制模式: DMX控制模式、声控模式、主从模式、程序自走模式

光学效果: 频闪, 白光LED经过由步进电机驱动上下移动的菲涅尔透镜,

聚焦成像后形成大小变幻的光束效果。

输入电压: 适配器AC100-240V 灯体DC12V 额定功率: 12W

最高使用环境温度: 40°C

**HSA080 is a LED Zoom Beam Light; the white LED will form changing of the light size beam effect after focusing image via the up and down movement of Fresnel lens which drive by stepper motor.**

Light Source: 8W LumiEngin-SC3 Lens: Fresnel

Control Channel : 4 DMX Channels Beam angle range: 4° - 47°

Control Protocol: International standard DMX512 control protocol

Strobe: High-speed electronic adjustment strobe, 1-20 flashes / sec

Control Mode: DMX, Sound Activate ,AUTO,Master Slave

Optical effects: Strobe, the white LED will form changing of the light size beam effect after focusing image via the up and down movement of Fresnel lens which drive by step motor.


Input Power: Adapter AC100-240V Light DC12V

Power consumption: 12W Working Environment: up to 40°C

产品尺寸Dimension: 141×φ102mm

彩盒尺寸Gift box Package: 250×150×115mm

净重N.W: 0.52Kg 毛重G.W: 0.86 kg

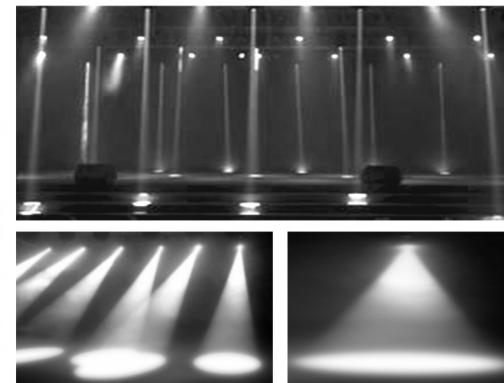

### 激光红绿幻影 UNIVERSAL STAR

Model: HSB030

HSB030是一款红激光和绿激光经过由电机带动的水纹镜，形成红色和绿色幻影效果的娱乐灯具。

光源: 红激光80mW 绿激光30mW

透镜: 水纹透镜

控制通道: 4个DMX通道

频闪: 高速的电子调节频闪, 频率可达1~20次/秒

控制模式: DMX控制模式、声控模式、主从模式、程序自走模式

光学效果: 频闪红激光和绿激光经过由电机带动的水纹镜,

形成红色和绿色幻影效果

输入电压: 适配器AC100-240V 灯体DC12V

额定功率: 6W

最高使用环境温度: 40°C

**HSB030 is a RG Laser Effect Light. It forms red and green fantasy effects by water vein lens which is driven by motor.**

Light Source: Red laser 80mW, Green laser 30mW

Lens: Waterlines lens

Control Channel : 4 DMX Channels

Control Protocol: International standard DMX512 control protocol

Strobe: High-speed electronic adjustment strobe, 1-20 flashes / sec

Control Mode: DMX, Sound Activate ,AUTO,Master Slave




Optical effects: Strobe, red and green fantasy effects caused by waterlines lens which is driven by motor.

Protection Rating: IP20

Input Power: Adapter AC100-240V Light DC12V

Power consumption: 6W

Working Environment: up to 40°C

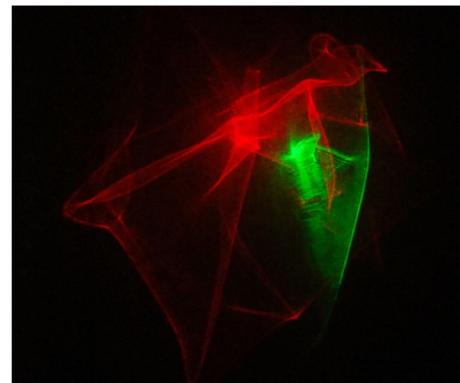



## 激光红绿多图 RG STYLI SHATTER LASER

Model: HSB001

HSB001 是一款以激光作为光源的效果灯具，激光通过光栅图案盘成像，再通过光栅镜一个变多个，然后步进电机带动图案盘快速或慢速运动产生丰富的娱乐效果。

光源：红激光80mW 绿激光30mW

控制通道：5个DMX通道

频闪：高速的电子调节频闪，频率可达1~20次/秒

控制模式：DMX512控制模式、声控模式、主从模式、程序自走模式

防护等级：IP20

输入电压：适配器AC100-240V 灯体DC12V

额定功率：6W

最高使用环境温度：40℃

**HSB001 is an Effect Light with laser light source. The imaging comes from grating pattern plate. One imaging will become more through the grating lens, and then rich entertainment effect will be emerged by the fast or slow rotation of the gobo wheel under the movement of the stepper motor.**

Light Source: Red laser 80mW, Green laser 30mW

Control Channel : 5 DMX Channels

Control Protocol: International standard DMX512 control protocol

Strobe: High- speed electronic adjustment strobe, 1- 20 flashes / sec

Control Mode: DMX, Sound Activate , AUTO,Master Slave

Optical effects: Strobe

Input Power: Adapter AC100-240V Light DC12V

DMX Socket: RJ45 network socket with one input and one output.

Power consumption: 6W




Working Environment: up to 40℃

产品尺寸Dimension: 141×φ102mm

彩盒尺寸Gift box Package: 250×150×115mm

净重N.W: 0.6kg

毛重G.W: 0.95 kg

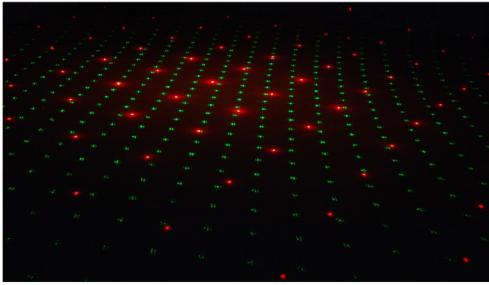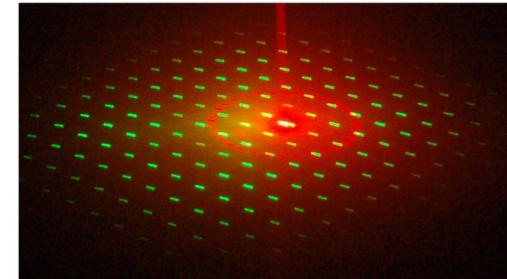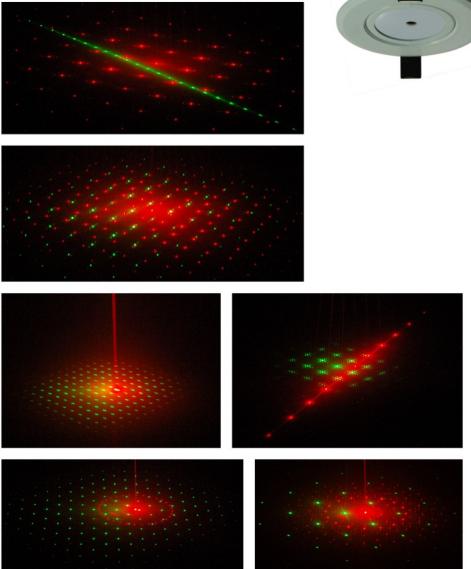

## 激光萤虫飞舞 LASER FIREFLY

Model: HSB011

HSB011是一款红激光和绿激光经过光栅片，由电机带动光栅片不同速运转，形成红色和绿色跳动斑点的娱乐灯具。

光源：红激光80mW 绿激光30mW

透镜：光栅片 控制通道：4个DMX通道

频闪：高速的电子调节频闪，频率可达1~20次/秒

控制模式：DMX控制模式、声控模式、主从模式、程序自走模式

光学效果：频闪

输入电压：适配器AC100-240V 灯体DC12V

额定功率：6W 最高使用环境温度：40℃

**HSB011 is a laser effect light. The red and green heating dot are formed by different moving speed of grating chip which is controlled by motor.**

Light Source: Red laser 80mW, Green laser 30mW

Control Channel : 4 DMX Channels

Control Protocol: International standard DMX512 control protocol

Strobe: High- speed electronic adjustment strobe, 1- 20 flashes / sec

Control Mode: DMX, Sound Activate , AUTO,Master Slave

Optical effects: Strobe

Input Power: Adapter AC100-240V Light DC12V

DMX Socket: RJ45 network socket with one input and one output.

Power consumption: 6W Working Environment: up to 40℃

产品尺寸Dimension: 140.8×φ102mm

彩盒尺寸Gift box Package: 250×150×115mm

净重N.W: 0.56kg 毛重G.W: 0.90 kg

## 激光红绿线条 RG LASER GRILLE

Model: HSB020

HSB020是一款红激光和绿激光经过线型光栅膜片，再由电机带动线型光栅膜片不同速运转而形成红色和绿色光条线条的激光灯具。

光源：红激光80mW 绿激光30mW

透镜：光栅片 控制通道：4个DMX通道

频闪：高速的电子调节频闪，频率可达1~20次/秒

控制模式：DMX512控制模式、声控模式、主从模式、程序自走模式

输入电压：适配器AC100-240V 灯体DC12V

额定功率：6W 最高使用环境温度：40℃

**HSB020 is a RG Grille Laser. The red and green lasers are formed by the different moving speed of grating chip which is controlled by the motor.**

Light Source: Red laser 80mW, Green laser 30mW

Lens: Grating chip Control Channel : 4 DMX Channels

Control Protocol: International standard DMX512 control protocol

Strobe: High- speed electronic adjustment strobe, frequency up to 1- 20 flashes / sec

Control Mode: DMX, Sound Activate , AUTO,Master Slave

Optical effects: Strobe



Input Power: Adapter AC100-240V Light DC12V

Power consumption: 6W Working Environment: up to 40℃

产品尺寸Dimension: 141×φ102mm

彩盒尺寸Gift box Package: 250×150×115mm

净重N.W: 0.56Kg 毛重G.W: 0.90 kg

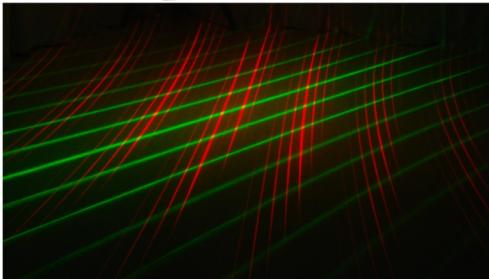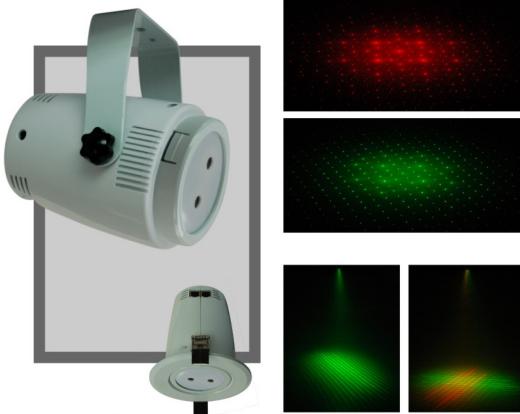

## Auxiliary products 配套产品



### 迷你DMX控制器 MINI DMX CONTROLLER

Model: SM211

SM211是一款袖珍DMX控台，小巧，方便，适用于舞台灯的检测、调试，通常也用于生产线的舞台灯调试。在微舞台领域，可自由控制HS系列灯具，广泛应用于小型酒吧、聚会、娱乐房等场所。

电源：适配器DC9V供电(适配器为AC100-240V开关电源)  
信号：DMX512

**Application fields:** small performances,outdoor party,  
**Engineering installation,**debugging and maintain the lamps.

Power supply: DC9V Input(External connect electronic Transformer AC100~240V),  
can charge the internal battery.Built-in 9V rechargeable battery,  
it can work 8 hours maximum when fully charged(close nixietube display mode).

Power: 1.2W(max), 0.5W(Disable display mode)

Digital signal: DMX512/1990

Features: LED display,8 channels.with page menu and buttons,you can control  
512 channels and store 30 scenes(the dimmer value of single-step 512 channels)  
Flexibility,small size,easy to carry,easy to use.

Appearance: streamline design  
Dimension size: 170.5 x 85.5 x 36 mm  
N.W: 0.33 kg,3.3 kg(10PCS/CTN)  
G.W: 0.45 kg,7.6 kg(10PCS/CTN)

### 烟机400W FOG RECREATION MACHINE 400W

Model: SI018

烟机是舞台灯光光效呈现的常用工具，安全的、对人体无害的  
烟雾能将光束表现出来，增加空间光效，强化现场气氛。

电源： AC 220-230 V/50Hz; AC 110-120 V/60Hz

功率： 400W

喷烟量： 3000cuff/min

烟油容量： 0.25 L

喷烟距离： 3M

喷烟时间： 3min

控制： 手动线控

Power supply: AC 220-230 V/50Hz; AC 110-120 V/60Hz

Power consumption: 400W

Control:Manual control

Tank capacity: 0.25L

Smoke output: 3000cuff/min

Output distance: 3M

Wire control distance: 5M

Warm up time:3min

Controls:Manual control, External remote control

产品尺寸 Dimension size: 255 x 128 x 150 mm

包装尺寸Packing size: 290 x 150 x 190 mm

610 x 330 x 420 mm(8PCS/CTN)


净重N.W: 2 kg

毛重G.W: 2.3 kg,18.4 kg(8PCS/CTN)



# 任意的安装……


Easy Installation

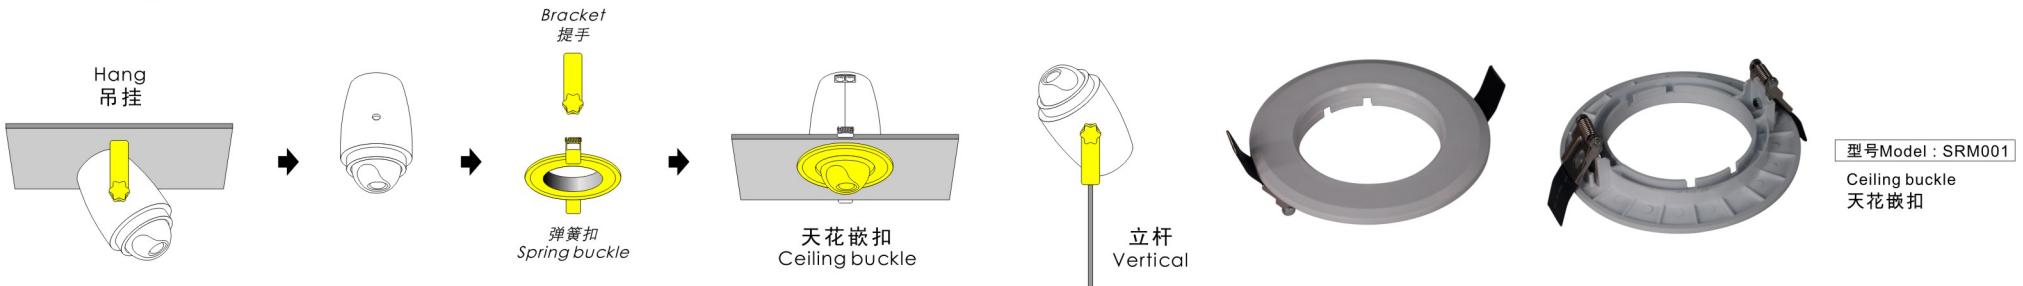

## A Multi-functional Installation 一种多功能的安装方式

可适用于任意场所的安装，可外露吊挂，  
可隐藏天花板扣，可立杆支撑，  
可墙壁钻孔挂，可台面摆放……  
不受场地限制，随时随地可用，  
美观，便捷，实用。

Many places can be used,  
various ways to install, such as , hanging,  
installing into ceiling with buckle,  
installing on vertical stand,  
installing in side wall and put on  
tables and so on. It can be applied  
to everywhere and any time,  
unlimited by situations Nice appearance,  
convenient and practical.

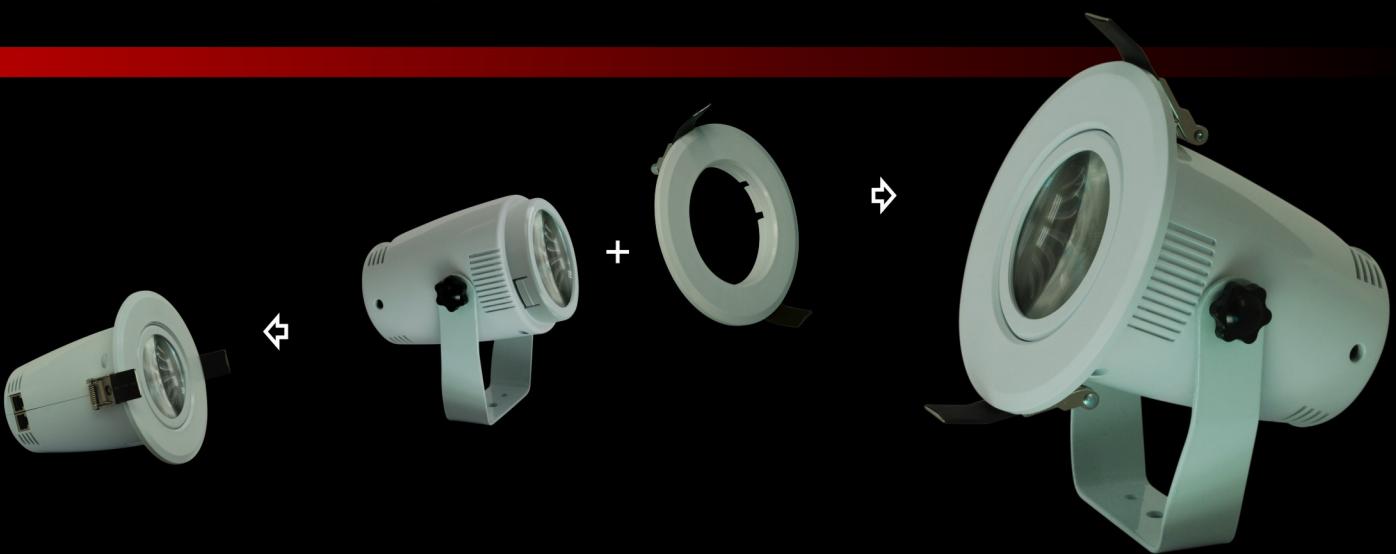



DMX控制器  
DMX Controller

型号Model : SRN001  
DMX signal cable  
信号线

型号Model : SRN002  
Network cable  
网络线



适配器  
Adapter

### 简便的控制…… Easy operation

**DMX Controller**  
DMX控制台

任何一台DMX512控制台均能自由控制。Any DMX512 controller can control.

**自走主从功能**  
Auto Master Slave

在没有任何控制设备下实现同步自走，可采用主从功能模式。Synchronized AutoRun without any controller under control. Master-Slave function mode can be.

**单机自走**  
Stand Alone

任何一台灯都有内置程序模式，通电即可自行运转。Any item had build-in program mode, can be run once energized.

**声控**  
Sound Activate


可随着环境音乐的节奏有规律地运行。Can be run as a regular rhythm of the music environment.



## 1 总统房 套餐


面积: 54平方米  
用灯数量: 40台

自走、声控、遥控程序  
内置灯光程序: 的士高、慢摇曲、  
Hi劲舞、抒情曲、生日曲、  
爱情曲、自由情景、浪漫情调、  
电视模式、静模式……  
可实现模拟专业演唱会舞台效果  
以及迪厅酒吧慢摇吧效果  
配套烟机效果更佳

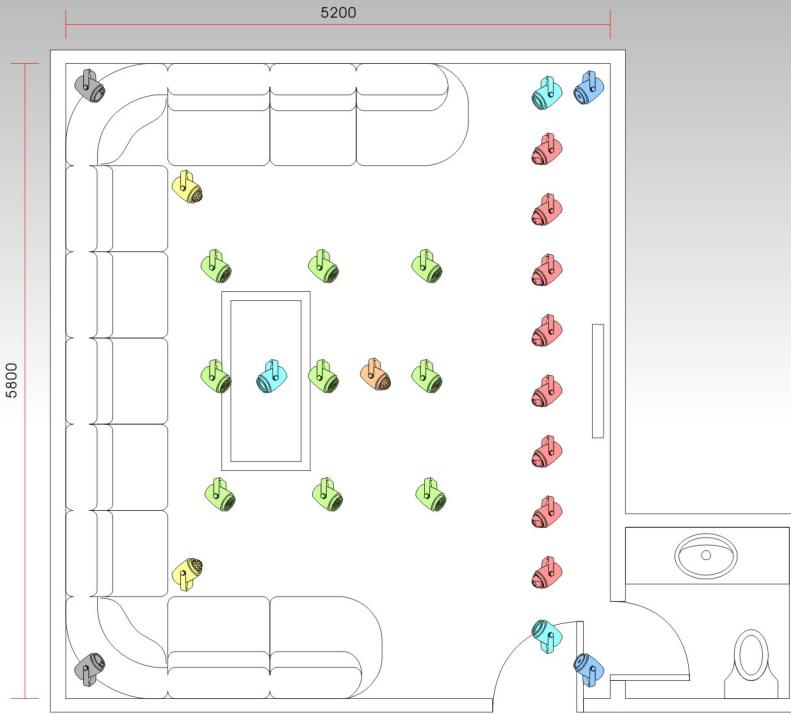


## 2 大包房 套餐

面积: 30 平方米  
用灯数量: 27台  
自走、声控、遥控程序  
内置灯光程序: 的士高、慢摇曲、  
Hi劲舞、抒情曲、生日曲、  
爱情曲、自由情景、浪漫情调、  
电视模式、静模式……  
可实现模拟专业演唱会舞台效果

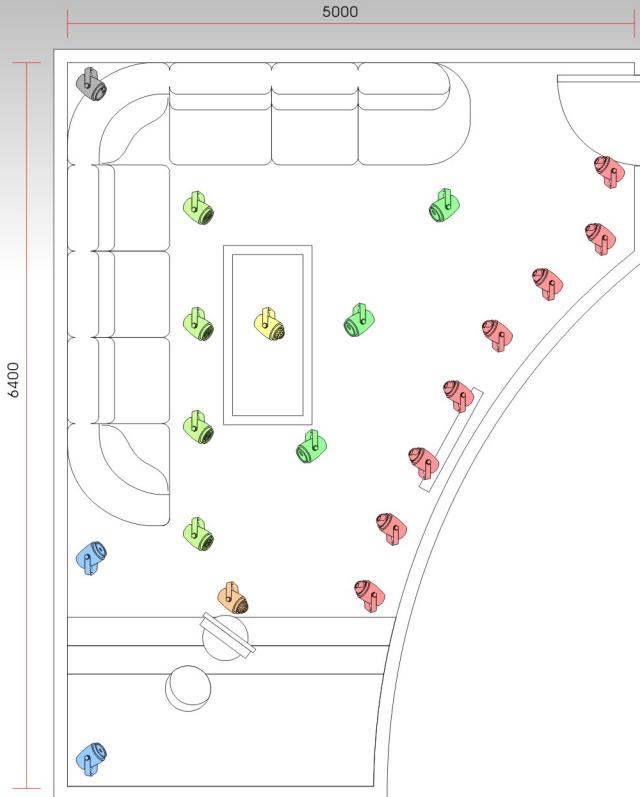


### 3 中包房 套餐

面积: 25平方米  
用灯数量: 20台  
自走、声控、遥控程序  
内置灯光程序: 的士高、慢摇曲、  
Hi劲舞、抒情曲、生日曲、  
爱情曲、自由情景、浪漫情调、  
电视模式、静模式……  
可实现迪厅酒吧慢摇吧效果  
配套烟机效果更佳

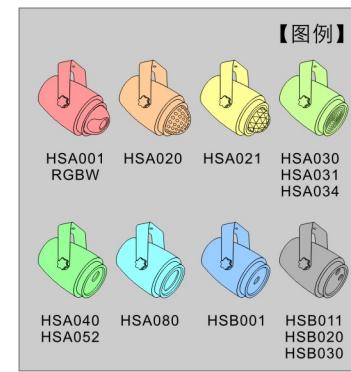


### 4 小包房 套餐

面积: 15平方米  
用灯数量: 11台  
自走、声控、遥控程序  
可实现迪厅酒吧慢摇吧效果  
配套烟机效果更佳

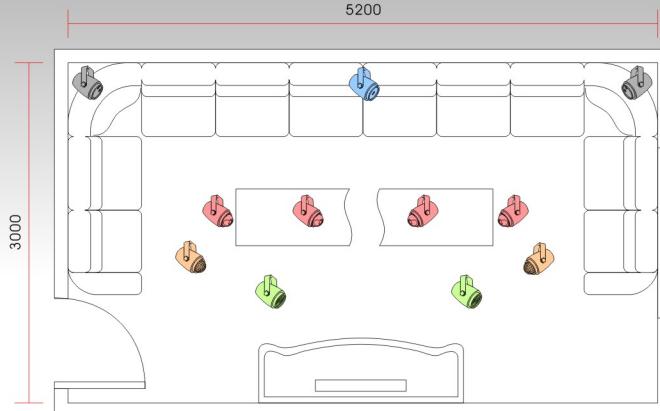

### 5 小包房 套餐

面积: 15平方米  
用灯数量: 5台  
自走、声控、遥控程序  
可实现迪厅酒吧慢摇吧效果  
配套烟机效果更佳

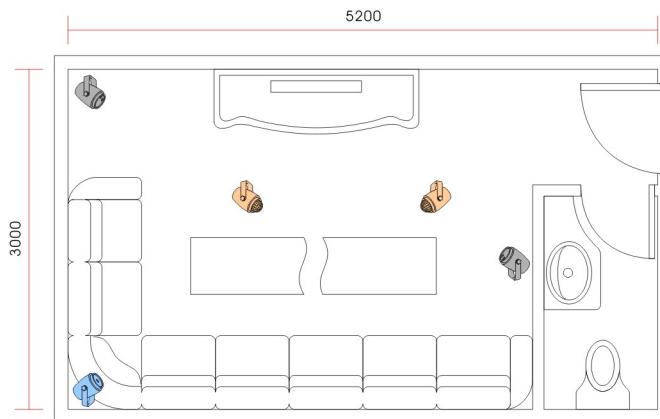



不仅仅只是肯定,更是一种鼓励,  
**我们会持续努力…**  
Not merely the recognition  
but an Encouragement!  
**Our Effort will be on and on !**

## 2016 FASHION LIFE

STAGE LIGHTING APPROACHING YOUR HOME

2016 潮生活  
微舞台·灯光